


PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------

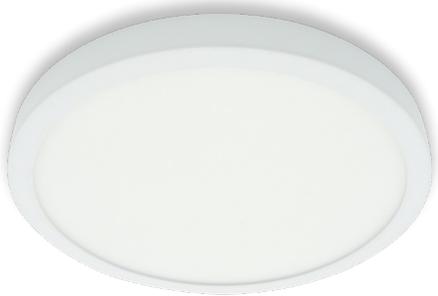

IDL

Corridor Disk

The IDL series LED Disk Light provides versatile lighting in 120V or 277V applications. Includes 0-10V Dimming capabilities for extra control with selectable color temperature. It's small profile is an easy upgrade to your downlighting from the traditional surface mounts to a more modern looking, energy efficient solution.




INPUT VOLTAGE	120-277V
INPUT FREQUENCY	60 Hz
RATED WATTAGE	See Performance Data
DELIVERED LUMENS	See Performance Data
EFFICACY	See Performance Data
CRI	90
AVAILABLE CCT	2700K, 3000K, 3500K, 4000K, 5000K
LENS TYPE	PS

RATED LIFE	≥50,000hrs
POWER FACTOR	>0.9
DIMMING	0-10V Dimmable
OPERATING TEMP.	-4°F - 113°F / -20°C to 45°C
BEAM ANGLE	120°

ORDER INFO / EXAMPLE: IDL-5-10-MVD-MCT-WH

SERIES	DIAMETER	RATED WATTAGE	DRIVER TYPE	COLOR TEMP	FINISH
IDL	5	10	MVD	MCT	WH
IDL Corridor Disk	5-5.51" 7-7.48" 9-8.86" 11-10.98" 13-12.8"	5 Housing 10- 10W, 850 Lumens 7 Housing 15- 15W, 1225 Lumens 9 Housing 18- 18W, 1500 Lumens 11 Housing 21- 21W, 2000 Lumens 13 Housing 24- 24W, 2200 Lumens	MVD- 120V-277V 0-10V Dimming	MCT- 2700K, 3000K, 3500K, 4000K, 5000K CCT Selectable, 90CRI	WH- White

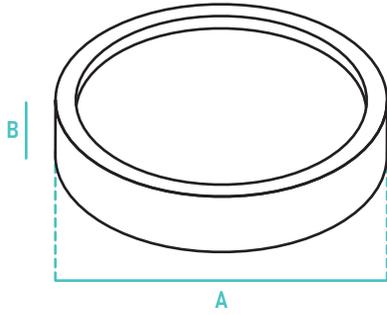

PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
5	27K-5K	10W	850	85 LPW
7	27K-5K	15W	1225	81.6 LPW
9	27K-5K	18W	1500	83.3 LPW
11	27K-5K	21W	2000	95.2 LPW
13	27K-5K	24W	2200	91.6 LPW

	A	B
IDL-5	5.51"	0.79"
IDL-7	7.48"	0.7"
IDL-9	8.86"	0.7"
IDL-11	10.98"	0.98"
IDL-13	12.8"	0.98"

ADDITIONAL IMAGES



RECOMMENDED DIMMERS

DVCL-153P (Lutron)

CONSTRUCTION

Die-cast aluminum housing with diffusion lens for optimal visual comfort while providing exceptional light output. Lens design and materials provide uniform appearance without pixelation.

ELECTRICAL

Equipped standard with a 120V-277V isolated driver with 0-10V Dimming.

QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Suitable for installation within the closet storage space (closet storage space is defined in NEC 410.8 & 410.16). Adheres to LM70, LM80 and TM21 industry standards. Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications.

INSTALLATION

Designed for mounting on 3" or 4" electrical J-Box.

WARRANTY

3-year Limited Warranty. See warranty documentation for more info.

COMPATIBLE JUNCTION BOX



4" PVC



4" Octagon



4" PVC Ceiling Box



3-1/2" Octagon



4" Round Pancake



4" Octagon / V Bracket