GLOBALUX

PROJECT NOTES TYPE DATE CA	CAT. No.
----------------------------	----------



EM2-LDL

Emergency Battery Backup for 6" & 8" LED Disk Light


Emergency operation of your lighting package is a simple decision with Integral Emergency Back-Ups in a surface mount collar. The EM2-LDL accessorie can be installed during the final stages of construction or remodel. With use with product line LDL series that includes "EMTB". *Light fixture sold separately



OUTPUT VOLTAGE	120V	LED Emerg Output Current	100mA-700mA
INPUT FREQUENCY	50/60 Hz	LED Output Protection	Self Resetting PTC
RECHARGE TIME	24-48 HRS	Illumination Time	90 min-350 min
INPUT CURRENT	0.07A	Output Power	8W (6"), 16W (8")
INPUT VOLTAGE	100-277VAC	DIMMING	N/A
OUTPUT CLASSIFICATION	UL924/Class2	OPERATING TEMP.	-25-+55C
COMPATIBLE BATTERIES	LiFePo4, NiCd, 9.6VDC	BEAM ANGLE	N/A

ORDER INFO / EXAMPLE: EM2-RDL-7-WH

SERIES	DIAMETER	FINISH
EM2-LDL	6	WH
EM2-LDL Emergency Battery Backup collar kit for LED Disk Light only	6- 8" 8- 8"	BL- Black BN- Brushed Nickel WH- White ORB- Oil Rubbed Bronze
*Disk Light Sold Separately (Refer to LDL2S or LDL4S Spec Sheet)		

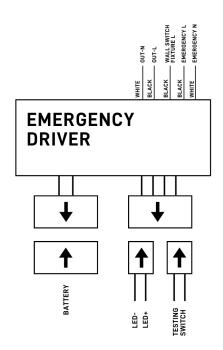

GlobaLux Lighting, LLC. | www.globaluxlighting.com | Ph: 909-591-7506 | © 2024 GlobaLux Lighting LLC. All rights reserved.