



Project	
Notes	
Type	Date
Cat. No.	

HEH™ Series Í GÁÓ^ ãã * ÁÓëã

Description
 V@ÁEHÁ^!ã•Áë^Áëëã ã Á -Áëãã * Áëã•Áëëã!ã * Áëãã] |^Á Á|ëë^Áë•ã } ÈV@Áë!ëã Áë ^•Áëã á
 Áëëëã } ëÁë•ã } Á -Áëã ÁÓÁ [ç |ÁÓÓÁëã Á ëÁ•Áëã Á|*ã ëëëëãã } Á Á [^ Áëë! ÈV@Á
 !^ç!•ë|Áëë!^ { ëÁ•Áëã Á |!-Á&ctoÁ•Áë^!ã * Áç!^Áëë } ÈÁ



HEH Series
52" Sweep



Specification Features

Construction
 Steel Housing, Black Blades and Frosted Glass Light Diffuser provides uniform appearance without pixelation.

Motor
 3-Speed AC Motor with 80" Lead Wire. Includes (1) 5" Downrod.

Blades
 52" Sweep, 5 Blade Configuration Blade
 Pitch Angle:12.5°
 Color: Rosewood / Dark Walnut (Reversible)

Electrical
 Operates at 120V 60HZ. Optional Remote Control (Sold Separately). Optional Wall Control (Sold Separately) .

Qualifications
 All ceiling fans are built to UL 507 standards, and bear appropriate ETL labels. Dry location labeling is standard.

Warranty
 Light Source: 3-year limited warranty. Motor: Limited Lifetime Warranty. Non-Electrical 1 Year Limited Warranty. See complete warranty for terms and exclusions. (Labor not included).

Limited Warranty 3 years
Light Source Efficacy: Up to 85 LPW



Special Order

Ordering Information

Example: HEH-52-5-3MB-120D-830-BN-PC

HEH	52	5	3MB	120D	830	BN	PC
Series	Size	Fan Blade	Light Source	Driver Type	Color Temp	Finish	Accessory
HEH Ceiling Fan	52- 52" Sweep	5-5 Blades	3MB- 3 Medium Base Socket; (3) 9.5W 800 Lumen Lamps	120D- 120V Dimming Dims to 10%	830- 3000K; 80+CRI	BN- Brushed Nickel WH- White BL- Black	PC- Pull Chain

Specifications and Dimensions subject to change without notice.

Lighting Performance Summary

Input Voltage	120V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	> 89 LPW (typ.)
CRI	80+, R9> 0
Available CCT ¹	3000K
Color Consistency ²	5-step MacAdam Ellipse
Rated Life	50,000 hours
L70 ³	> 72,000 hours or > 45,000
Power Factor	>0.99
THD	< 20%
Dimming	Triac Dimming
Operating Temp.	-18°C to 40°C

Fan Performance Summary

Fan Diameter	52"
Motor Lead Lengths	80"
Motor Size	AC 153mm x 13mm
Electricity Use (H/M/L)	59W/28W/10.45W
AMPS (H/M/L)	0.49/0.35/0.21


Lighting Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)	Delivered Lumens	Efficacy (lm/W)
Frosted Glass	52"	HEH-52-5-3MB-120D-830	21W	2,400	85

Fan Performance Data

RPM (H/M/L)	178/127/70
Airflow Efficiency (CFM/W)	90
Airflow (CFM)	High Speed: 4,585
Average Airflow CFMav	3,271

Product Dimensions

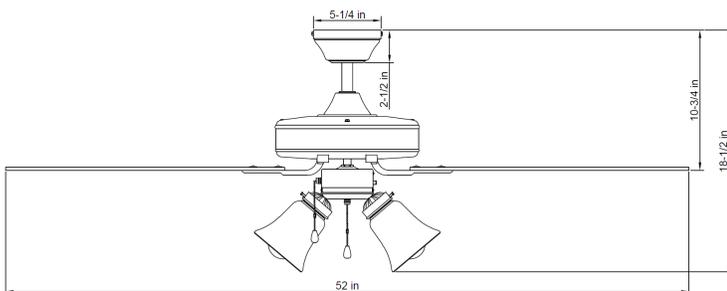

NOTES:

- Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- Energy Star Listed **N/A**
- Typical color consistency. May vary or be changed.
- L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact manufacturer for detailed information
- Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

