

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



REXS

Recessed Edge Lit LED Exit Sign (Special Order)

The REXS Series is a recessed edge-lit LED exit sign that features an architectural, slim design to fit into an environment offering specification grade aesthetics with in field installation flexibility. Attractive and functional, the REXS series is completely self-contained and utilizes reliable, energy efficient LED illumination. REXS series edge-Lit exits are well suited for any application requiring attractive edge-lit exit signs. Typical installations include commercial spaces such as retail, offices or medical facilities but can be applied in any space where an upgrade appearance is desired.




INPUT VOLTAGE	120-277V
INPUT FREQUENCY	50/60 Hz
RATED WATTAGE	2.5W
DELIVERED LUMENS	See Performance Data
EFFICACY	N/A
CRI	>70CRI
AVAILABLE CCT	N/A
LENS TYPE	N/A

RATED LIFE	60,000hrs
L70	> 72,000 hours or > 45,000
POWER FACTOR	>0.9
THD	N/A
DIMMING	N/A
OPERATING TEMP.	0°C to 50°C
BEAM ANGLE	N/A

ORDER INFO / EXAMPLE: REXS-1-W-R

QUICK SHIP ITEMS ON PG.2

SERIES	FACES	HOUSING COLOR	LETTERING	BATTERY
REXS	1	A	R	AC
REXS Recessed Edge Lit LED Exit Sign	1- 1 Face (Transparent Panel) 2- 2 Faces (Mirror Panel)	A- Aluminum W- White B- Black	R- Red G- Green	AC- AC Only

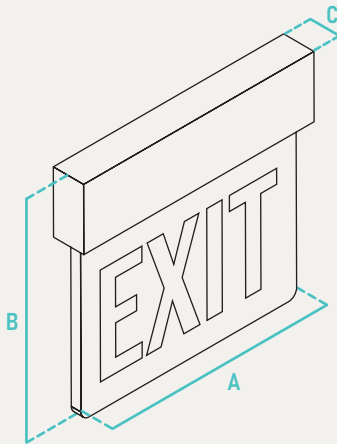

PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
REXS	N/A	2.5W	N/A	N/A

QUICK SHIP

While Supplies Last

ADDITIONAL IMAGES



Made to order items. Minimum 90 day lead time.
 Minimum order quantity may vary please contact sales.
 1 DLC Listed / 2 DLC Premium Listed / 3 Title 24 / 4 JA8 & Title 24
 Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact Globalux for detailed information.
 Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

	A	B	C	Case QTY
EXS	15.75" W	11.5" H	5.43" D	N/A

CONSTRUCTION

Premium-grade, extruded aluminum housing. Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance. (Available in optional black or white powder-coated finishes). Self-adhesive Chevron appliques and guide template provided for directional indication.

ELECTRICAL

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 4.8V long-life, maintenance - free, rechargeable NiCad battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

QUALIFICATIONS

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations (0° C - 50° C).

INSTALLATION

Compatible with drywall or drop ceiling mount installations. (Bar hangers included). Wall mount capability optional.

WARRANTY

5-year Limited Warranty on all electronics and housing.
 Battery pro rated for 5 years.

COMPATIBLE JUNCTION BOXES



4" PVC	4" Octagon	4" PVC Ceiling Box	3-1/2" Octagon	4" Round Pancake	4" Octagon / V Bracket
--------	------------	--------------------	----------------	------------------	------------------------