

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



# DCD

## Decorative Ceiling Fixture

The LED based DCD series is a ceiling or wall mount series which can be used in a broad range of residential and commercial applications. This series provides customers with a high quality luminaire utilizing the latest LED, solid state lighting and electronic driver technology for optimal performance and maximized energy efficiency. With a traditional opal white lens, the DCD series produces even, uniform light distribution and ideal choice for offices, corridors, stairways, bedroom, closet and foyer applications where customers are replacing incandescent, circline or compact fluorescent lamps.




INPUT VOLTAGE	120V
INPUT FREQUENCY	60 Hz
RATED WATTAGE	See Performance Data
DELIVERED LUMENS	See Performance Data
EFFICACY	60 LPW (typ.)
CRI	90
AVAILABLE CCT	2700K, 3000K, 3500K, 4000K, 5000K
LENS TYPE	Plastic

RATED LIFE	30,000hrs (Based on 3hrs a Day)
L70	>50,000hrs
POWER FACTOR	>0.9
THD	N/A
DIMMING	Triac Dimming
OPERATING TEMP.	-4°F - 113°F / -20°C to 45°C
BEAM ANGLE	N/A

### ORDER INFO / EXAMPLE: DCD-15-26-120D-MCT-BN

QUICK SHIP ITEMS ON PG.2

SERIES	DIAMETER	RATED WATTAGE	DRIVER TYPE	COLOR TEMP	FINISH
<b>DCD</b>	<b>15</b>	<b>26</b>	<b>120D</b>	<b>MCT</b>	<b>BN</b>
<b>DCD</b> Decorative Ceiling Drum	<b>15- 15" Pan</b>	<b>15" Pan</b> 26- 26W, 1560 Lumens	<b>120D</b> - 120V Dimming, Triac Dimming, 10-100%	<b>MCT</b> - 2700K, 3000K, 3500K 4000K, 5000K CCT Selectable; 90CRI	<b>BN</b> - Brushed Nickel <b>BL</b> - Black

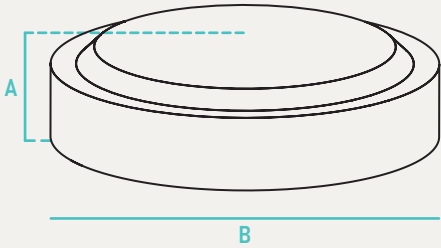

### PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
15"	27K-5K	26W	1560	60

### QUICK SHIP

DCD-15-26-120D-MCT-BN <sup>4</sup>

### ADDITIONAL IMAGES



### RECOMMENDED DIMMERS

DVCL-153P (Lutron)

	A	B	Case Qty
DCD	3.59" H	15.24" Dia	5

### CONSTRUCTION

Contemporary decorative fixture with brushed nickel finished steel ring and frosted plastic diffuser. Lens design and materials provide uniform appearance without pixelation.

### ELECTRICAL

Equipped standard with 120V, 10-100% dimming driver.

### QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Suitable for closets according to NEC Section 410.8 & 410.16. Adheres to LM70, LM80 and TM21 industry standards. JA8 and Title 24 approved.

### INSTALLATION

Designed for wall or ceiling mounting on 4" electrical J-Box.

### WARRANTY

3-year Limited Warranty. See warranty documentation for more info.


### COMPATIBLE JUNCTION BOXES



4" PVC      4" Octagon      4" PVC Ceiling Box      3-1/2" Octagon      4" Round Pancake      4" Octagon / V Bracket

## PHOTOMETRIC DATA

DCD-15-26-120D-MCT-BN

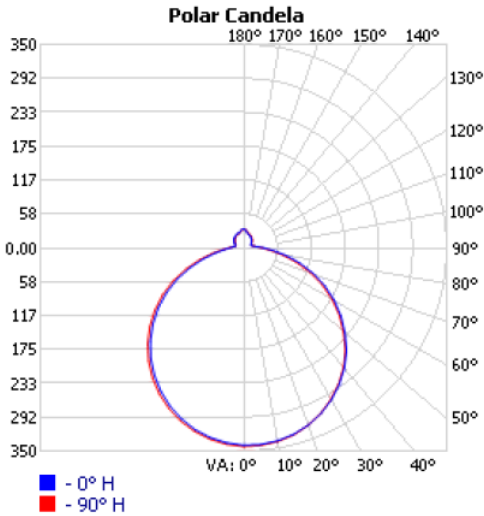

### Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	266.4	22.3%	22.3%
0-40	440.0	36.8%	36.8%
0-60	795.8	66.6%	66.6%
60-90	276.1	23.1%	23.1%
70-100	161.1	13.5%	13.5%
90-120	53.7	4.5%	4.5%
0-90	1,072.0	89.7%	89.7%
90-180	123.1	10.3%	10.3%
0-180	1,195.0	100%	100%

Made to order items. Minimum 90 day lead time. Minimum order quantity may vary please contact sales.

<sup>1</sup> DLC Listed / <sup>2</sup> DLC Premium Listed / <sup>3</sup> Title 24 / <sup>4</sup> JA8 & Title 24 / Typical color consistency. May vary or be changed.

L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact Globalux for detailed information. / Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.