

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------

DCS2

Decorative Ceiling Fixture



The LED Based DCS2 series is a ceiling or wall mount series which can be used in a broad range of residential and commercial applications. This series provides customers with a high quality luminaire utilizing the latest LED, solid state lighting and electronic driver technology for optimal performance and maximized energy efficiency. With a traditional opal white lens, the DCS2 series produces even, uniform light distribution and ideal choice for offices, corridors, stairways, bedroom, closet and foyers applications where customers are replacing incandescent, circline or compact fluorescent lamps.




INPUT VOLTAGE	120V
INPUT FREQUENCY	50/60 Hz
RATED WATTAGE	See Performance Data
DELIVERED LUMENS	See Performance Data
EFFICACY	70 LPW (typ.)
CRI	90CRI
AVAILABLE CCT	2700K, 3000K, 3500K, 4000K, 5000K
LENS TYPE	Plastic

RATED LIFE	50,000hrs (Based on 3hrs a Day)
L70	>50,000hrs
POWER FACTOR	>0.71
THD	<20%
DIMMING	120V Dimming (10-100%)
OPERATING TEMP.	-0.4°F - 104°F / -18°C to 40°C
BEAM ANGLE	N/A

ORDER INFO / EXAMPLE: DCS2-13-26-120D-MCT-BN

SPECIAL ORDER

SERIES	DIAMETER	RATED WATTAGE	DRIVER TYPE	COLOR TEMP	FINISH
DCS2	13	26	120D	MCT	BN
DCS2 LED Decorative Ceiling Fixture	13-13" Pan	13" Pan 26- 26W, 1820 Lumens	120D - 120V Dimming, 10-100%	MCT - 2700K, 3000K, 3500K, 4000K, 5000K CCT Selectable; 90CRI	BN - Brushed Nickel

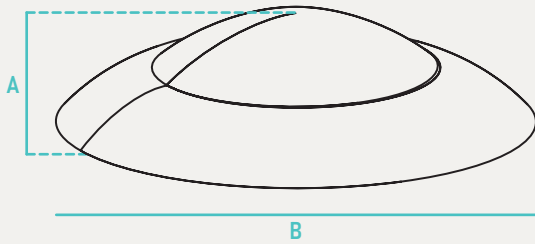

PERFORMANCE DATA				
FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
13"	27K-5K	26W	1820	70

ADDITIONAL IMAGES



RECOMMENDED DIMMERS

DVCL-153P (Lutron)

Made to order items. Minimum 90 day lead time.
 Minimum order quantity may vary please contact sales.
¹ DLC Listed / ² DLC Premium Listed / ³ Title 24 / ⁴ JA8 & Title 24
 Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information.
 Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

	A	B
DCS2	2.87" H	13" Dia

CONSTRUCTION

Contemporary decorative fixture with brushed nickel finish steel pans and frosted plastic diffuser. Lens design and materials provide uniform appearance without pixelation.

ELECTRICAL

Equipped standard with 120V 10-100% dimming driver.

QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards.

INSTALLATION

Designed for wall or ceiling mounting on 4" electrical J-Box.

WARRANTY

3-year limited warranty. See complete warranty for terms and exclusions. (Labor not included)

COMPATIBLE JUNCTION BOX



4" PVC	4" Octagon	4" PVC Ceiling Box	3-1/2" Octagon	4" Round Pancake	4" Octagon / V Bracket
--------	------------	--------------------	----------------	------------------	------------------------