


Ordering Information

Dimensions



Specification Features

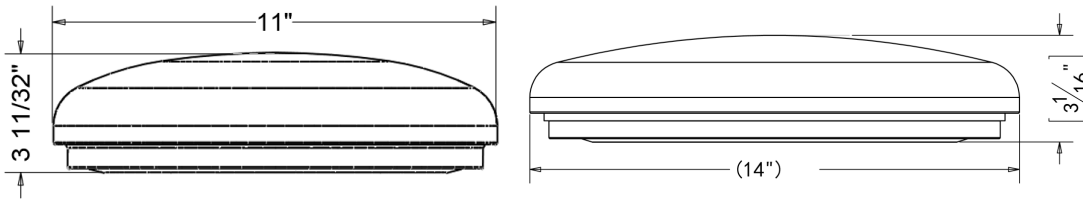

Construction

Features a white acrylic and white powder coated steel pan. Available in 11", 14", 19" diameters. lens design and materials provide uniform appearance without pixelation.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

Electrical

Equipped standard with 120V 10-100% dimming driver.

Installation

Designed for wall or ceiling mounting on 4" electrical J-Box.

Warranty

3-year Limited Warranty. See warranty documentation for more information.

GCC Series

- 11"**
13W, 850 Lumens
- 14"**
17W, 1200 Lumens
- 19"**
26W, 1900 Lumens
- 34W**, 2700 Lumens

Rated Life 50,000 hours
Limited Warranty 3 years
Efficacy Up to 77 LPW
Continuous Dimming



Quick Ship

- GCC-11-13-120D-940
- GCC-14-17-120D-940
- GCC-14-26-MV-940

Ordering Information

Example:GCC-11-13-120D-940

GCC	11	13	120D	9	40
Series GCC LED Generic Ceiling Cloud	Size 11- 11"Pan ² 14- 14"Pan ² 19- 19" Pan ²	Rated Wattage <u>11" Pan</u> 13- 13W, 850 Lumens ² <u>14" Pan</u> 17- 17W, 1200 Lumens ² 26- 26W, 1900 Lumens ² <u>19" Pan</u> 34- 34W, 2700 Lumens	Driver Type 120D- 120V Dimming, Dims to 10% <u>26W & 34W</u> MV- 120-277V	CRI 8 80+ CRI ¹ 9 90+ CRI ²	Color Temp 30 3000 K ¹ 40 4000 K ²
Options					
Emergency Backup			Controls		
EML8 800lm EML16 1600lm			MOS-Microwave Sensor on/off		

Specifications and Dimensions subject to change without notice.

- 1 Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- 2 Energy star listed