

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------

FINISH OPTIONS ON PAGE 2

MOD

52" Moderna Ceiling Fan

The MOD series is a ceiling fan featuring a stylish 3 blade design. With clean lines and modern design this fan makes a modernized addition to your contemporary home décor. The reversible feature makes this fan perfect to use during every season.




INPUT VOLTAGE	120V	COLOR CONSISTENCY	5-Step MacAdams Ellipse
INPUT FREQUENCY	60 Hz	RATED LIFE	20,000hrs (Based on 3hrs a Day)
RATED WATTAGE	18W	L70	N/A
DELIVERED LUMENS	1000Lm	POWER FACTOR	N/A
EFFICACY	55.5 LPW (typ.)	THD	N/A
CRI	80CRI	DIMMING	Yes
AVAILABLE CCT	3000K	OPERATING TEMP.	-0.4°F - 104°F / -18°C to 40°C
FAN DIAMETER	52"	RPM (H/M/L)	175-189 / 125-139/ 75-85
MOTOR LEAD LENGTHS	80"	AIRFLOW EFFICIENCY (CFM/W)	72
MOTOR SIZE	AC 153mm x 13mm	AIRFLOW (CFM)	High Speed: 3,636
ELECTRICITY USE (H/M/L)	52W / 32W / 13W	AVERAGE AIRFLOW CFMave	2,595
AMPS (H/M/L)	0.5 / 0.35 / 0.21	BEAM ANGLE	N/A
LENS TYPE	Acrylic		

ORDER INFO / EXAMPLE: MOD-52-3-18-120D-830-BN-SB-PC

QUICK SHIP ITEMS ON PG.2

SERIES	SIZE	FAN BLADE	LIGHT SOURCE	DRIVER TYPE	COLOR TEMP	FINISH	BLADE COLOR	ACCESSORY
MOD	52	3	18	120D	830	BN	SB	PC
MOD 52" Moderna Ceiling Fan	52- 52" Sweep	3- 3 Blades	18- 18W Integrated LED 1000 Lumens	120D- 120V Dims to 10%	830- 3000K, 80+CRI	BN- Brushed Nickel WH- White BL- Black	SB- Silver / Black Rev. WH- White BL- Black	PC- Pull Chain CFW- Wall Control

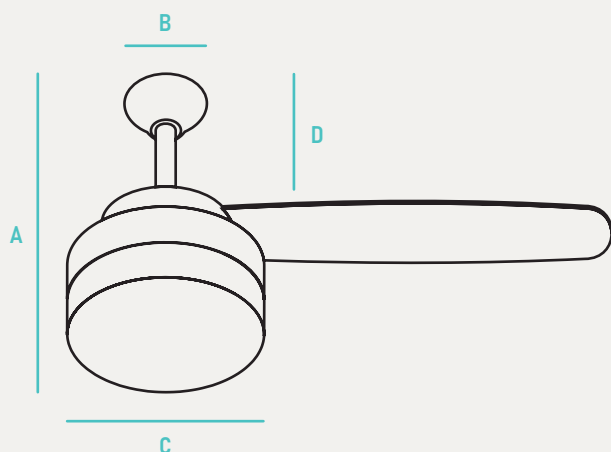

	A	B	C	D	Case QTY
MOD	11-3/4"	4-1/25"	4-1/25"	8-1/25"	1

CONSTRUCTION

Steel Housing, Plywood Blades and Acrylic Diffuser provides uniform appearance without pixelation.

MOTOR

Reversible 3-Speed with 80" Lead Wire. Premium Silicone Steel AC Motor

QUALIFICATIONS

All ceiling fans are built to UL 507 standards, and bear appropriate ETL labels. Dry location labeling is standard.

BLADES

52" Sweep, 3 Blade Configuration; Blade Pitch: 11°; Color: Black

ELECTRICAL

Operates at 120V 60HZ.

WARRANTY

Light Source: 3-year limited warranty. Motor: Limited Lifetime Warranty. Non-Electrical 1 Year Limited Warranty. See complete warranty for terms and exclusions. (Labor not included).

COMPATIBLE JUNCTION BOXES



4" PVC Ceiling Box

QUICK SHIP

MOD-52-3-18-120D-830-BN-SB-PC

MOD-52-3-18-120D-830-WH-WH-PC


ADDITIONAL IMAGES



RECOMMENDED DIMMERS

DVCL-153P (Lutron)

INSTALLATION INSTRUCTIONS

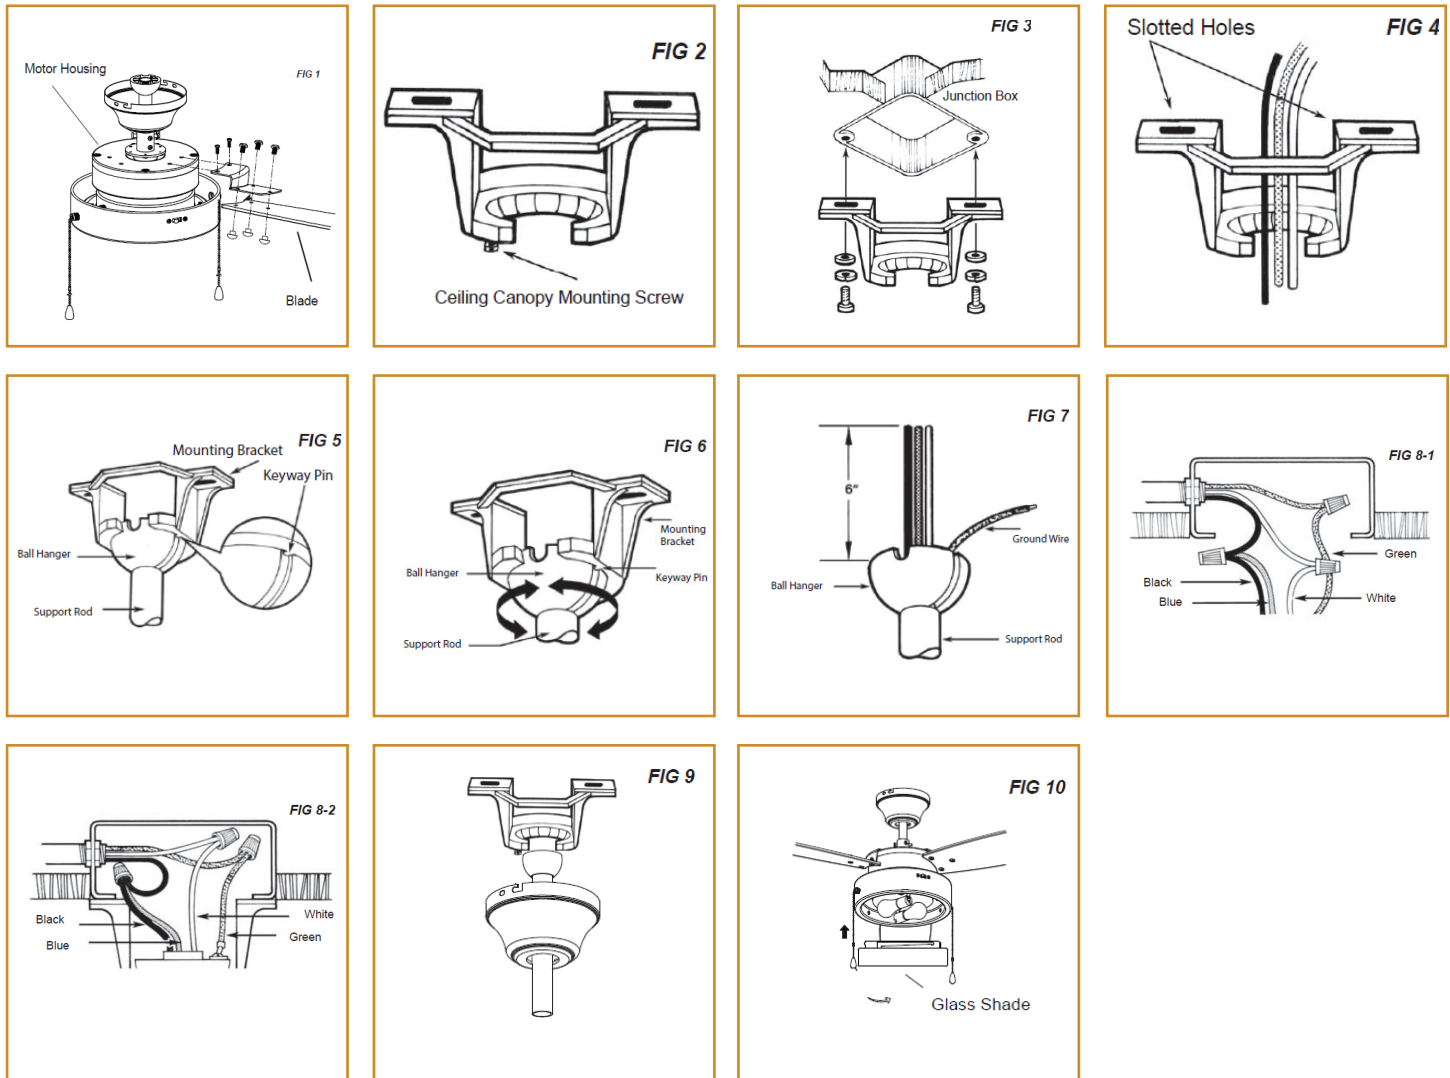

Made to order items. Minimum 90 day lead time. Minimum order quantity may vary please contact sales.

¹ DLC Listed / ² DLC Premium Listed / ³ Title 24 / ⁴ JA8 & Title 24 / Typical color consistency. May vary or be changed.

L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information. / Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.