

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------

# TRK2

## Track Light Fixture



The TRK2 Series Track Light Fixtures are available in stylish brushed nickel or sleek black finishes, making them a perfect addition to any modern living space. Designed for optimal directional lighting, these fixtures enhance your interior without overpowering it. The gimbal heads provide excellent illumination for areas like living rooms and bedrooms, while the adjustable light heads offer flexibility to direct light exactly where you need it. Rated for use in damp locations, these indoor lights are crafted from premium materials, ensuring durability and long-lasting performance. Illuminate your home with the perfect blend of style and functionality.




INPUT VOLTAGE	120V
INPUT FREQUENCY	60 Hz
RATED WATTAGE	See Performance Data
DELIVERED LUMENS	See Performance Data
EFFICACY	N/A
CRI	80CRI
AVAILABLE CCT	3000K
LENS TYPE	N/A

RATED LIFE	25,000hrs (Based on 3hrs a Day)
L70	N/A
POWER FACTOR	0.7
THD	<20%
DIMMING	120V (10-100%)
OPERATING TEMP.	32°F - 104°F / 0°C to 40°C
BEAM ANGLE	N/A

ORDER INFO / EXAMPLE: TRK2-6-GU10-120D-830-BN

QUICK SHIP ITEMS ON PG.2

SERIES	FORM FACTOR	RATED WATTAGE	DRIVER TYPE	COLOR TEMP	FINISH
TRK2	6	GU10	120D	830	BN
TRK2 Track Light Fixture	6- 6 Light 44" Length	6" Light Housing GU10- 6x50W GU10 Halogen Lamps	120D- 120V; 10-100% Dimming	830- 3000K; 80CRI	BL- Black BN- Brushed Nickel

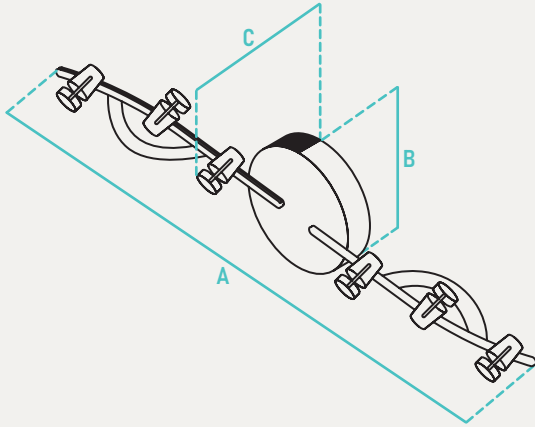

	A	B	C	Case QTY
TRK2-6	44" W	5-1/4" H	4-7/8"	6

### CONSTRUCTION

Die Cast Aluminum Heads on a curved aluminum frame. Each of the track heads is mounted on a swivel to allow them to be moved and adjusted for customized, directional lighting.

### ELECTRICAL

LED models equipped standard with 120V, 10-100% dimming driver operating at 60Hz.

### QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80 and TM21 industry standards. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications.

### INSTALLATION

Designed for ceiling mounting on 4" electrical J-Box.

### WARRANTY

3-year Limited Warranty. See warranty documentation for more info.


### PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
6 Light	3000K	6x50W	N/A	N/A

### QUICK SHIP

TRK2-6-GU10-120D-830-BN

### ADDITIONAL IMAGES

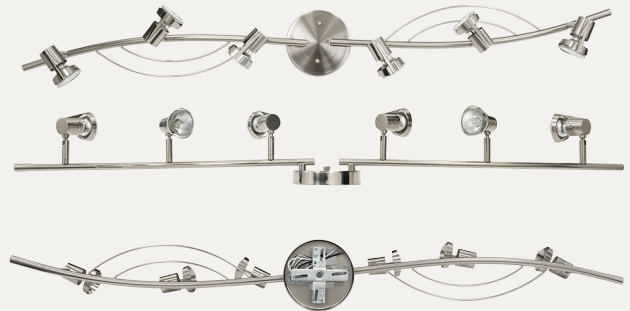

### RECOMMENDED DIMMERS

DVCL-153P (Lutron)

Made to order items. Minimum 90 day lead time.  
 Minimum order quantity may vary please contact sales.  
<sup>1</sup> DLC Listed / <sup>2</sup> DLC Premium Listed / <sup>3</sup> Title 24 / <sup>4</sup> JA8 & Title 24  
 Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact Globalux for detailed information.  
 Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

### COMPATIBLE JUNCTION BOXES



4" PVC



4" Octagon



4" PVC Ceiling Box



3-1/2" Octagon




4" Round Pancake



4" Octagon / V Bracket

## PHOTOMETRIC DATA

RDL-7

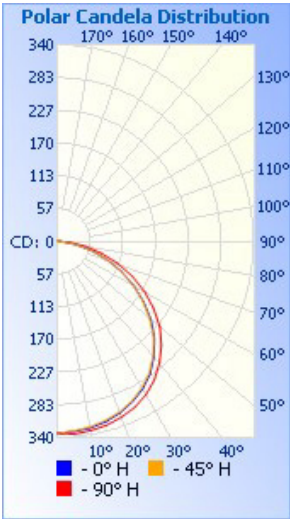

Zonal Lumen Summary			
Zone	Lumens	% Lamp	% Luminaire
0-30	266.3	25.7%	25.7%
0-40	444.5	42.8%	42.9%
0-60	806.5	77.7%	77.8%
60-90	227.7	21.9%	22%
70-100	96.7	9.3%	9.3%
90-120	1.1	0.1%	0.1%
0-90	1,034.2	99.6%	99.7%
90-180	2.7	0.3%	0.3%
0-180	1,036.9	99.9%	100%

Coefficients Of Utilization - Zonal Cavity Method																		
												Effective Floor Cavity Reflectance: 20%						
RCC %:	80				70				50				30	10	0			
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.08	1.03	.99	.95	1.06	1.01	.97	.84	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2	.98	.90	.83	.77	.96	.88	.81	.70	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3	.89	.79	.70	.64	.87	.77	.69	.59	.74	.67	.62	.71	.65	.61	.69	.64	.60	.57
4	.82	.69	.60	.54	.79	.68	.60	.51	.66	.58	.52	.63	.57	.52	.61	.55	.51	.49
5	.75	.62	.53	.46	.73	.61	.52	.44	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6	.69	.56	.46	.40	.67	.55	.46	.38	.53	.45	.39	.51	.44	.39	.49	.43	.39	.36
7	.64	.50	.41	.35	.62	.49	.41	.34	.48	.40	.35	.46	.40	.34	.45	.39	.34	.32
8	.60	.46	.37	.31	.58	.45	.37	.30	.44	.36	.31	.42	.36	.31	.41	.35	.30	.29
9	.56	.42	.34	.28	.54	.41	.33	.27	.40	.33	.28	.39	.32	.28	.38	.32	.27	.26
10	.52	.39	.31	.25	.51	.38	.30	.25	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

Made to order items. Minimum 90 day lead time. Minimum order quantity may vary please contact sales.

<sup>1</sup> DLC Listed / <sup>2</sup> DLC Premium Listed / <sup>3</sup> Title 24 / <sup>4</sup> JA8 & Title 24 / Typical color consistency. May vary or be changed.

L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information. / Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.