

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



# OWPS

## Rectangular Outdoor Wall Pack

The OWPS Outdoor Wall Pack features high-performance LEDs encased in a durable, weather-resistant housing. Its frosted, high-impact diffuser ensures uniform illumination, making it perfect for lighting up corridors and patios.




INPUT VOLTAGE	120V
INPUT FREQUENCY	50/60 Hz
RATED WATTAGE	See Performance Data
DELIVERED LUMENS	See Performance Data
EFFICACY	80 LPW (typ.)
CRI	80CRI
AVAILABLE CCT	3000K, 4000K, 5000K
LENS TYPE	Plastic

RATED LIFE	50,000hrs (Based on 3hrs a Day)
L70	>50,000hrs
POWER FACTOR	>0.9
THD	N/A
DIMMING	N/A
OPERATING TEMP.	-4°F - 113°F / -20°C to 45°C
BEAM ANGLE	N/A

### ORDER INFO / EXAMPLE: OWPS-12-120-MCT-WH

QUICK SHIP ITEMS ON PG.2

SERIES	RATED WATTAGE	DRIVER TYPE	COLOR TEMP	FINISH
<b>OWPS</b>	<b>12</b>	<b>120</b>	<b>MCT</b>	<b>WH</b>
<b>OWPS</b> Rectangular Outdoor Wall Pack	<b>12-</b> 12W, 968 Lumens	<b>120-</b> 120V	<b>MCT-</b> 3000K, 4000K, 5000K CCT Selectable; 80CRI	<b>WH-</b> White

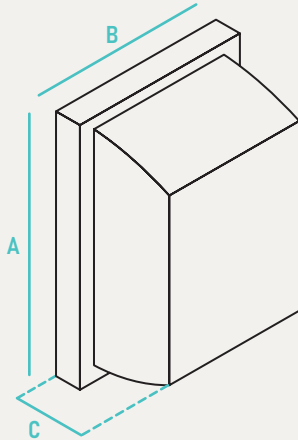

PERFORMANCE DATA				
FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
OWPS	3K/4K/5K	12W	968	80

QUICK SHIP
OWPS-12-120-MCT-WH

### ADDITIONAL IMAGES



Made to order items. Minimum 90 day lead time.  
 Minimum order quantity may vary please contact sales.  
<sup>1</sup> DLC Listed / <sup>2</sup> DLC Premium Listed / <sup>3</sup> Title 24 / <sup>4</sup> JA8 & Title 24  
 Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information.  
 Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

	A	B	C
OWPS	10.6" H	6" W	4" E

### CONSTRUCTION

Contemporary Styled fixture, two twin steel rings surround a high-transmission frosted plastic diffuser designed to eliminate glare and optimize lumen output.

### ELECTRICAL

Equipped standard with 120V fixed output driver operating at 60Hz.

### QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications.

### INSTALLATION

Designed for mounting on 4" electrical J-Box.

### WARRANTY

3-year Limited Warranty. See warranty documentation for more info.

### COMPATIBLE JUNCTION BOX



4" PVC	4" Octagon	4" PVC Ceiling Box	3-1/2" Octagon	4" Round Pancake	4" Octagon / V Bracket
--------	------------	--------------------	----------------	------------------	------------------------