


Ordering Information

Dimensions



Specification Features

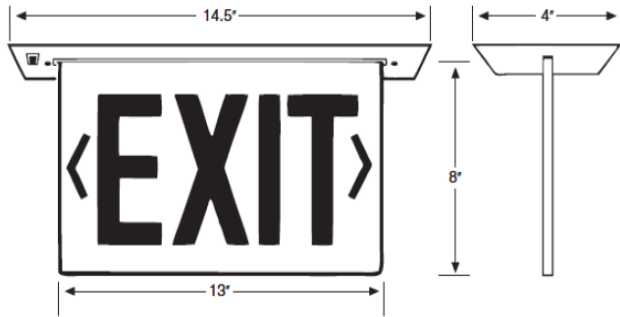

Construction

Premium-grade, extruded aluminum housing. Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance. (Available in optional black or white powder-coated finishes). Self-adhesive Chevron appliques and guide template provided for directional indication.

Qualifications

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations (0° C - 50° C).

Warranty

5-year Limited Warranty on all electronics and housing. Battery pro rated for 5 years.

Electrical

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 4.8V long-life, maintenance - free, rechargeable NiCad battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Installation

Compatible with drywall or drop ceiling mount installations. (Bar hangers included). Wall mount capability optional.

REXS Series

Limited Warranty 5-years

Quick Ship

Made to order only

Ordering Information

Example: REXS-1-W-R-AC-SD

REXS	2	W	R	AC	SD	
Series REXS Recessed Edge Lit LED Exit Sign	Faces 1 2	Housing W - White B- Black	Lettering R - Red G - Green	Battery	Option	

Specifications and Dimensions subject to change without notice.