


Ordering Information

Dimensions



DCF-11
D: 11"
H: 4-1/4"
DCF-14
D: 14"
H: 6"

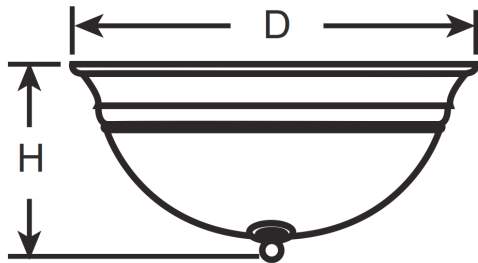

Specification Features



Construction

Contemporary decorative fixture with choice of oil rubber bronze or nickel satin finished steel pans and frosted glass diffusers with matching finial.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JAS compliant, CEC Listed.

Warranty

3-year limited warranty. See complete warranty for terms and exclusions. (Labor not included)

Electrical

Equipped standard with 120V 15-100% dimming driver, operating at 60 Hz. Dims to 10%.

Installation

Designed for ceiling mounting on 4" electrical J-Box.

DCF Series

13' 13W, (1000 Lumens)
17' 17W, (1700 Lumens)

Rated Life 50,000 hours
Limited Warranty 3 years
Efficacy Up to 77 LPW
Continuous Dimming



Quick Ship

DCF-11-13-120D-930-NS
DCF-11-13-120D-930-ORB
DCF-14-17-120D-930-NS
DCF-14-17-120D-930-ORB

Ordering Information

Example: DCF-11-13-120D-930-ORB

DCF	11	13	120D	9	30	ORB
Series	Size	Rated Wattage	Driver Type	CRI	Color Temp	Finish
DCF Decorative Ceiling Finial	11- 11"Pan ² 14- 14"Pan ²	11" Pan 13- 13W, 1000 Lumens ² 14" Pan 17- 17W, 1700 Lumens ²	120D- 120V Dimming, Dims to 10%	9 90+ CRI	30- 3000 K² 40-4000 K^{1 2}	NS- Nickel Satin² ORB- Oil Rubbed Bronze²

Specifications and Dimensions subject to change without notice.

¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
² Energy star listed