


Ordering Information

Dimensions



Specification Features

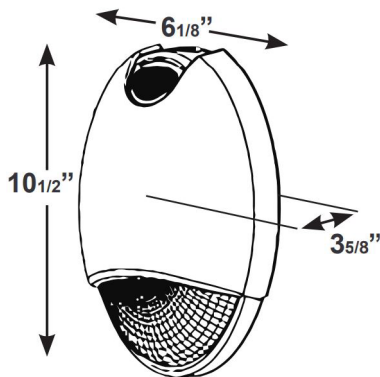

Construction

Decorative low profile architectural design, seated and gasketed die cast aluminum housing.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards.

Warranty

5-year Limited Warranty. See warranty documentation for more information.

Electrical

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 3.6 long-life, maintenance - free, rechargeable NiCad. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharging a discharged battery in 24 hours.

Installation

Suitable for surface mounting via black plate that fits most exists J-boxes. Threaded opening at the top of the enclosure for conduit mount.

AEL Series

- Black Finish
- Bronze Finish
- White Finish

Rated Life 60,000 hours
Limited Warranty 5-years
Efficacy Up to 130 LPW

Quick Ship

Made to order only

Ordering Information

Example: AEL-BR-EM

AEL	BL	EM	PC			
Series AEL Architectural LED AC/Emergency light	Color BL - Black BR - Bronze WH - White	Emergency Battery EM - Emergency Battery	Accessories CW - Cold Weather Operation PC - Photocell EM - 90 minute battery			

Specifications and Dimensions subject to change without notice.