


Ordering Information

Dimensions

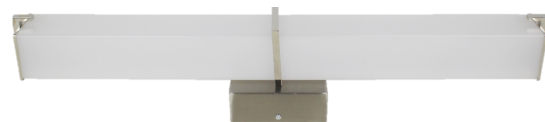

LSV Series

24" Length

20W, 1,920 Lumens

36" Length

27W, 2,592 Lumens

48" Length

36W, 3,456 Lumens

Specification Features



Construction

Single ring surround a milk white acrylic diffuser with decorative end caps provides widespread and even illumination. Lens design and materials provide uniform illumination without pixelation.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

Electrical

Equipped standard with 120V fixed output driver operating at 60 Hz.

Installation

Designed for wall mounting on 4" electrical J-Box.

Rated Life 60,000 hours

Limited Warranty 3 years

Efficacy up to 96 LPW

Quick Ship

LSV-24-20-120-930-BN
LSV-36-27-120-930-BN
LSV-48-36-120-930-BN

Warranty

3-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

Ordering Information

Example: LSV-24-20-120-930-BN

LSV	24	18	120	CRI	30	NS
Series LSV LED Square Vanity	Form Factor 24- 24" Length ^{2,3} 36- 36" Length ^{2,3} 48- 48" Length ^{2,3}	Rated Wattage 24" Housing 20- 20W, 1,920 Lumens 36" Housing 27- 27W, 2,592 Lumens 48" Housing 36- 36W, 3,456 Lumens	Driver Type 120- 120V ¹	CRI 9 90+CRI	Color Temp 30 3000K ³	Finish BN- Brushed Nickel ORB- Oil Rubbed Bronze

Specifications and Dimensions subject to change without notice