

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



# SLS

## CCT Adjustable LED Slim Channel Strip


The SLS™ Series LED Slim Strip delivers industry-leading performance with deep energy savings and continuous dimming. Its low-profile design offers easy handling and storage. This versatile luminaire produces energy-efficient, comfortable illumination for a myriad of applications.



INPUT VOLTAGE	120V-277V
INPUT FREQUENCY	-
RATED WATTAGE	20W, 30W, 40W
DELIVERED LUMENS	5800
EFFICACY	145
CRI	80
AVAILABLE CCT	3000K, 4000K, 5000K
LENS TYPE	Plastic

RATED LIFE	-
L70	-
POWER FACTOR	-
THD	-
DIMMING	0-10V
OPERATING TEMP.	-4°F - 113°F / -20°C to 45°C
BEAM ANGLE	120°

SERIES	DIAMETER/SIZE	RATED WATTAGE	DRIVER TYPE	COLOR TEMP
<b>SLS</b>	<b>4</b>	<b>AW</b>	<b>MVD</b>	<b>MCT</b>
<b>SLS</b> CTT Adjustable LED Slim Channel Strip	4- 48"	<b>AW-</b> 20W, 30W, 40W Selectable	<b>MVD-</b> 120-277V, 0-10V Dimming	<b>MCT-</b> 3000K, 4000K, 5000K CCT Selectable; 80CRI
<b>OPTIONS/ACCESSORIES</b>				
<b>EM-SLS-AW-</b> 8W Emergency Battery Backup for SLS Series <b>OS-SLS-AW-</b> Occupancy sensor for SLS Series <b>RM-SLS-AW-</b> Remote Control to program OS-SLS-AW				

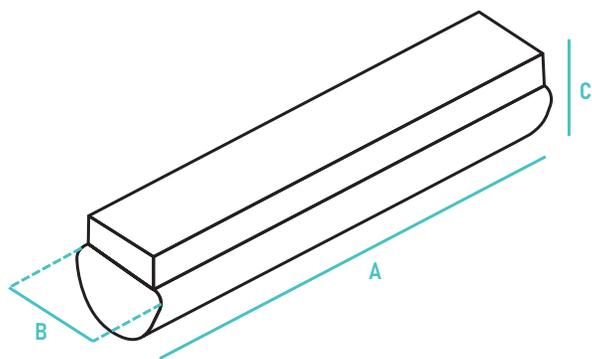

	A	B	C
SLS-4	48"	3.25"	3.15"

## PERFORMANCE DATA

MODEL	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
SLS-4	3000K	20W	2700	135
SLS-4	4000K	20W	2900	145
SLS-4	5000K	20W	2800	140
SLS-4	3000K	30W	4050	135
SLS-4	4000K	30W	4350	145
SLS-4	5000K	30W	4200	140
SLS-4	3000K	40W	5400	135
SLS-4	4000K	40W	5800	145
SLS-4	5000K	40W	5600	140

## ELECTRICAL

Equipped standard with 120-277V, 0-10V dimming driver.

## QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Dry location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80 and TM21 industry standards.

## INSTALLATION

Suitable for surface mounting.

## WARRANTY

5-year Limited Warranty. See warranty documentation for more info.

## COMPATIBLE JUNCTION BOXES



4" PVC



4" Octagon



4" PVC Ceiling Box



4" Round Pancake



4" Octagon / V Bracket