

High Performance Design Can Customize To Your Environment

Housing

Rugged die cast aluminum resists corrosion, rust, weather, degradation.

Sensor Options

Optional dawn to dusk photocell



Lens

Internal heat dissipation acrylic lens provides superior thermal management, durability and long life,

Mounting


Mounts to a 3" diameter round pole using 2 3/8" tenon adapter.

CCT Switch

CCT Switch technology can accommodate multiple temperatures from warmest to coolest tones of white. Color temperature can be adjusted to either 3000K, 4000K or 5000K.

Driver

120-277V driver operates at 60Hz

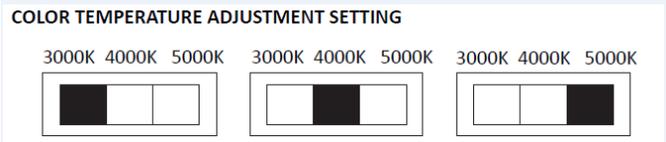


PTL Wattage Comparison

Parking lots, stadiums, warehouse facilities



Ordering Information

Dimensions

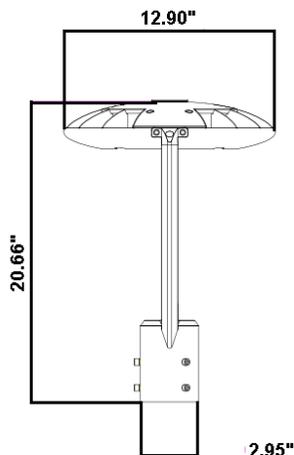

PTL Series

55W, (7,150 Lumens)

Specification Features



Construction

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable bronze power coating to provide resistant to corrosion, rust, weathering, and or degradation. Performance engineered internal heat dissipation fins provide superior thermal management for lens life and reliability.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate UL labels. Wet location labeling is standard. Adheres to LM70, LM80, and TM21 industry standards. DesignLights Consortium® (DLC) Premium qualified product. Not all product variations listed are DLC qualified. Please visit the DLC Qualified Products List at www.designlights.org/QPL to confirm which models are qualified.

Electrical

Equipped standard with fixed output, 120-277V driver operating at 60Hz. Long Life LED's, at L80 with projected life over 60,000 hours for reduced life cycle maintenance costs. Adjustable CCT at 3000K, 4000K, 5000K.

Installation

Easily mounts to a 3" diameter round pole using a 2 3/8" tenon adapter.

Warranty

5-year Limited Warranty. See warranty documentation for more information.

Rated Life 50,000 hours
Limited Warranty 5 years
Efficacy Up to 130 LPW

Quick Ship

PTL-55-MV-830/40/50

Ordering Information

Example: PTL-55-MV-830/40/50

PTL	55	MV	8	30/40/50	P
Series PTL LED Post Top Lantern	Rated Wattage 55- 55W, (7,150 Lumens)	Driver Type MV-120-277V	CRI 8 80+ CRI	Color Temp 30/40/50- 3000/4000/5000K	Option P- Photocell ²

Specifications and Dimensions subject to change without notice.

Adders Options & Accessories

Photocell

Adjustable dusk-to-dusk photocell automatically turns light on at dusk and off at dawn for convenience and energy savings

Motions Sensors

P -

Photocell