

| | | | | |
|---------|-------|------|------|----------|
| PROJECT | NOTES | TYPE | DATE | CAT. No. |
|---------|-------|------|------|----------|

MCF

52" Modern Ceiling Fan

The MCF series are a family of ceiling fans featuring a simple 3 blade design. The clean lines and modern design of this AC Motor LED fan makes an elegant addition to your contemporary home décor. The reversible feature makes this fan perfect to use during every season.




FINISH OPTIONS ON PAGE 2

| | | | |
|-------------------------|--------------------|----------------------------|---------------------------------|
| INPUT VOLTAGE | 120V | RATED LIFE | 20,000hrs (Based on 3hrs a Day) |
| INPUT FREQUENCY | 50/60 Hz | L70 | >72,000hrs or >45,000 |
| RATED WATTAGE | 18W | POWER FACTOR | >0.99 |
| DELIVERED LUMENS | 1000Lm | THD | <20% |
| EFFICACY | 55.5 LPW (typ.) | DIMMING | Yes |
| CRI | 80CRI | OPERATING TEMP. | -0.4°F - 104°F / -18°C to 40°C |
| AVAILABLE CCT | 3000K | RPM (H/M/L) | 206 / 158 / 100 |
| FAN DIAMETER | 52" | AIRFLOW EFFICIENCY (CFM/W) | 97 |
| MOTOR LEAD LENGTHS | 80" | AIRFLOW (CFM) | at High Speed:4278 |
| MOTOR SIZE | AC 153mm x 13mm | AVERAGE AIRFLOW CFMave | 3209 |
| ELECTRICITY USE (H/M/L) | 51.1 / 31 / 12.8 | BEAM ANGLE | 150° |
| AMPS (H/M/L) | 0.42 / 0.33 / 0.21 | LENS TYPE | Acrylic |

ORDER INFO / EXAMPLE: MCF-52-3-18-120D-830-BN-SB-PC

QUICK SHIP ITEMS ON PG.2

| SERIES | SIZE | FAN BLADE | LIGHT SOURCE | DRIVER TYPE | COLOR TEMP | FINISH | BLADE COLOR | ACCESSORY |
|-------------------------------|------------------|-------------|------------------------------------|---------------------------|-----------------------|--|---|-------------------------------------|
| MCF | 52 | 3 | 18 | 120D | 830 | BN | SB | PC |
| MCF 52" Modern Ceiling Fan | 52- 52" Sweep | 3- 3 Blades | 18- 18W Integrated LED 1500 Lumens | 120D- 120V Dims to 10% | 830- 3000K, 80+CRI | BN- Brushed Nickel WH- White BL- Black | SB- Silver / Black Rev. WH- White BL- Black W- Walnut DW- Dark Walnut | PC- Pull Chain CFW- Wall Control |

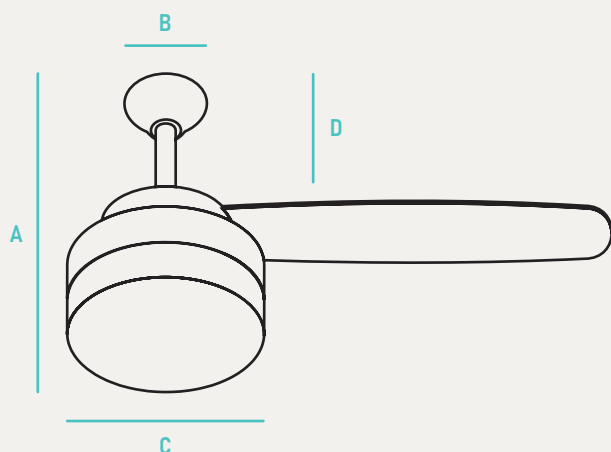

| | A | B | C | D | Case QTY |
|-----|---------|--------|---------|---------|----------|
| MCF | 15-3/4" | 5-7/8" | 6-9/10" | 12-1/5" | 1 |

CONSTRUCTION

Steel Housing, Plywood Blades and Arylic Light Diffuser provides uniform appearance without pixelation.

MOTOR

3-Speed AC Motor with 80" Lead Wire. Includes (1) 6" Downrod.

QUALIFICATIONS

All ceiling fans are built to UL 507 standards, and bear appropriate ETL labels. Dry location labeling is standard.

BLADES

52" Sweep, 3 Blade Configuration, Blade Pitch Angle:12°, Color: Silver

ELECTRICAL

Operates at 120V 60HZ. Optional Remote Control (Sold Separately).
Optional Wall Control (Sold Separately) .

WARRANTY

Light Source: 3-year limited warranty. Motor: Limited Lifetime Warranty.
Non-Electrical 1 Year Limited Warranty. See complete warranty for terms and exclusions. (Labor not included).

RECOMMENDED DIMMERS

DVCL-153P (Lutron)

QUICK SHIP

MCF-52-3-18-120D-830-BN-SB-PC

MCF-52-3-18-120D-830-BL-BL-PC

ADDITIONAL IMAGES














COMPATIBLE JUNCTION BOXES



4" PVC Ceiling Box

INSTALLATION INSTRUCTIONS

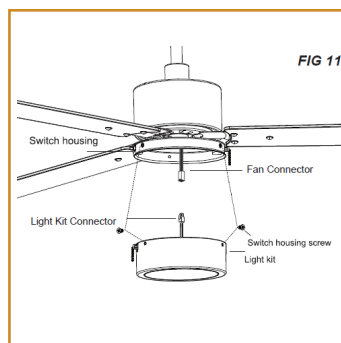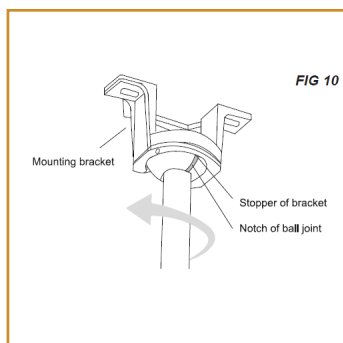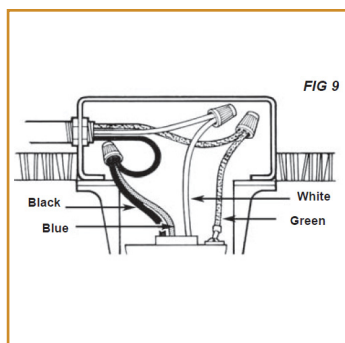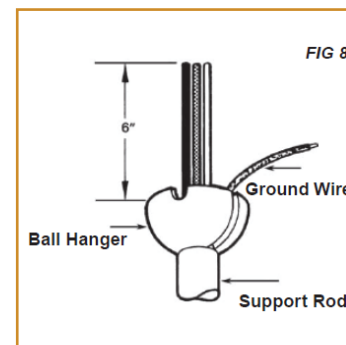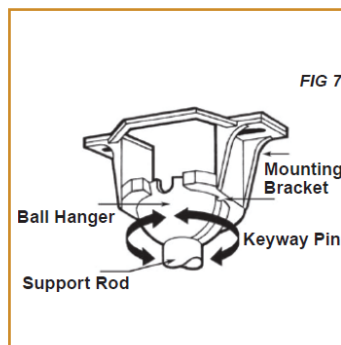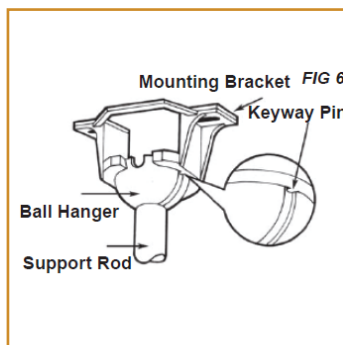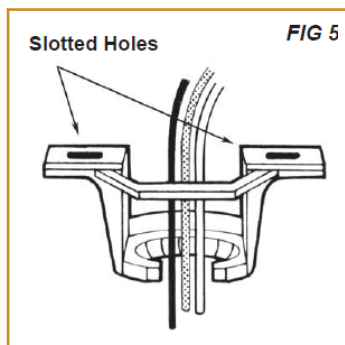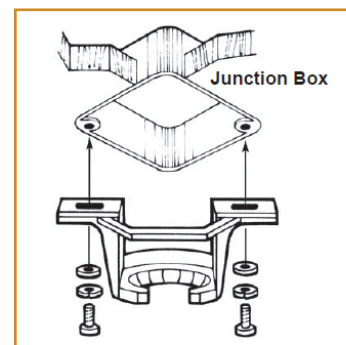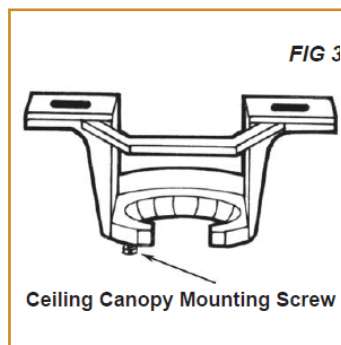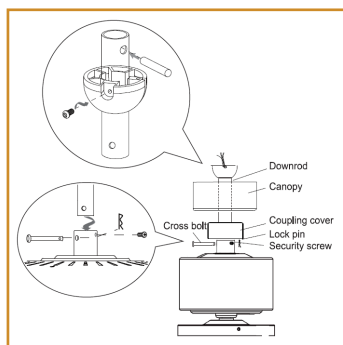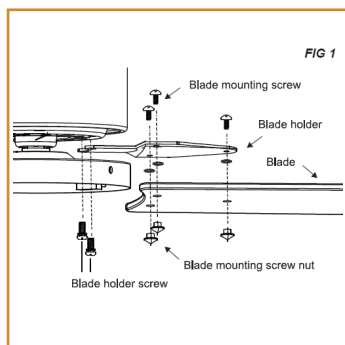

Made to order items. Minimum 90 day lead time. Minimum order quantity may vary please contact sales.

¹ DLC Listed / ² DLC Premium Listed / ³ Title 24 / ⁴ JA8 & Title 24 / ⁵ Energy Star / Typical color consistency. May vary or be changed.

L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information. / Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.