

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



WXS

Wet Location Exit & Exit/Emergency

The WXS (Wet Location Exit Sign) series is engineered to perform in the most extreme environment. A fully gasketed polycarbonate lens and ABS housing enable the WXS to be; installed in locations that require Wet Location rated protection. Ideal for wet location areas requiring exit signs for AC only or battery back-up power that are subject to saturation with non-mechanically delivered water.




INPUT VOLTAGE	120-277V
INPUT FREQUENCY	50/60 Hz
RATED WATTAGE	3.5W
DELIVERED LUMENS	N/A
EFFICACY	N/A
CRI	>70CRI
AVAILABLE CCT	N/A
LENS TYPE	N/A

RATED LIFE	30,000hrs (Based on 3hrs a Day)
L70	N/A
POWER FACTOR	>0.45
THD	N/A
DIMMING	N/A
OPERATING TEMP.	32°F - 104°F / 0°C to 40°C
BEAM ANGLE	120°

ORDER INFO / EXAMPLE: WXS-R

SERIES	LETTERING	BATTERY
WXS	R	
WXS Wet Location Exit	R - Red G - Green	BLANK - 90 Min Battery AC - AC Only

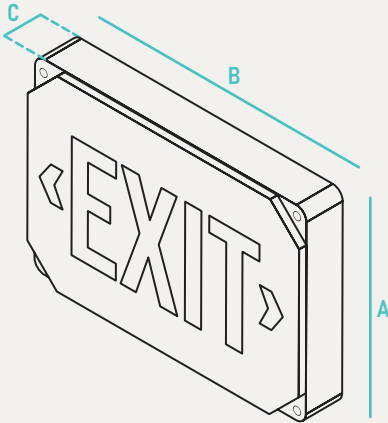



PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
WXS	N/A	3.5W	N/A	N/A

QUICK SHIP

WXS-R

ADDITIONAL IMAGES

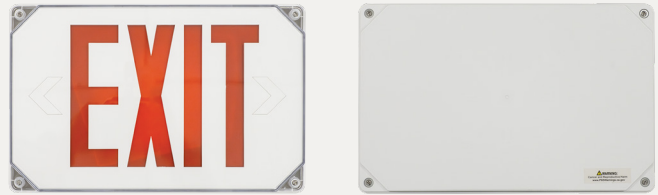

	A	B	C	Case QTY
WXS	8.70" H	12.60" W	2.6" D	6

CONSTRUCTION

5VA flame retardant, UV-stabilized polycarbonate grey finish. High-impact resistant, UV stabilized polycarbonate clear lens. Knockouts provided for conduit feed applications. EZ snap-out Chevron directional indicators

ELECTRICAL

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 3.6 long-life, maintenance - free, rechargeable NiCad. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharging a discharged battery in 24 hours.

QUALIFICATIONS

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and state codes. UL Listed for wet locations (9°C - 40°C).

INSTALLATION

Mounting hardware provided for back surface wall mount.

WARRANTY

5-year Limited Warranty. See warranty documentation for more info. Battery pro rated for 5 years

Made to order items. Minimum 90 day lead time.
 Minimum order quantity may vary please contact sales.
¹ DLC Listed / ² DLC Premium Listed / ³ Title 24 / ⁴ JA8 & Title 24
 Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact Globalux for detailed information.
 Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

COMPATIBLE JUNCTION BOXES



4" PVC	4" Octagon	4" PVC Ceiling Box	3-1/2" Octagon	4" Round Pancake	4" Octagon / V Bracket
--------	------------	--------------------	----------------	------------------	------------------------