

|         |       |      |      |          |
|---------|-------|------|------|----------|
| PROJECT | NOTES | TYPE | DATE | CAT. No. |
|---------|-------|------|------|----------|

## HES2

### 52" Ceiling Fan

The HES2 series are a family of ceiling fans featuring a simple 5 blade design. The clean lines and traditional design of this AC Motor LED fan makes an elegant addition to your contemporary home décor. The reversible feature makes this fan perfect to use during every season.




|                         |                          |                            |                                 |
|-------------------------|--------------------------|----------------------------|---------------------------------|
| INPUT VOLTAGE           | 120V                     | COLOR CONSISTENCY          | 5-Step MacAdams Ellipse         |
| INPUT FREQUENCY         | 50/60 Hz                 | RATED LIFE                 | 50,000hrs (Based on 3hrs a Day) |
| RATED WATTAGE           | 2-9W LED Bulbs           | L70                        | >72,000hrs or >45,000           |
| DELIVERED LUMENS        | 650Lm                    | POWER FACTOR               | >0.99                           |
| EFFICACY                | 72 LPW (typ.)            | THD                        | <20%                            |
| CRI                     | 80CRI                    | DIMMING                    | No                              |
| AVAILABLE CCT           | 3000K                    | OPERATING TEMP.            | -0.4°F - 104°F / -18°C to 40°C  |
| FAN DIAMETER            | 52"                      | RPM (H/M/L)                | 148 / 122 / 77                  |
| MOTOR LEAD LENGTHS      | 80"                      | AIRFLOW EFFICIENCY (CFM/W) | 88                              |
| MOTOR SIZE              | AC 153mm x 12mm          | AIRFLOW (CFM)              | High Speed: 3,724               |
| ELECTRICITY USE (H/M/L) | 53.23W / 34.36W / 16.24W | AVERAGE AIRFLOW CFMave     | 2,891                           |
| AMPS (H/M/L)            | 0.45 / 0.36 / 0.25       | BEAM ANGLE                 | N/A                             |
| LENS TYPE               | Frosted White Glass      | BLADE PITCH                | 12°                             |


ORDER INFO / EXAMPLE: HES2-52-5-2MB-120-830-BN-SG-PC

COMING SOON

| SERIES           | SIZE          | FAN BLADE   | LIGHT SOURCE   | DRIVER TYPE | COLOR TEMP                                      | FINISH                          | BLADE COLOR  | ACCESSORY      |
|------------------|---------------|-------------|--|-------------|---|---------------------------------|--|----------------|
| HES2             | 52            | 5           | 2MB  | 120         | 830   | BN                              | SG   | PC             |
| HES2 Ceiling Fan | 52- 52" Sweep | 5- 5 Blades | 2MB- 2 Medium Base Socket (2) 9W, 650 Lumens<br><b>Blank-</b> No Light Kit | 120- 120V   | 830- 3000K, 80CRI<br><b>Blank-</b> No Light Kit | BN- Brushed Nickel<br>BL- Black | SG- Silver/ Grey Weathered Reversible<br>RB- Rosewood/ Dark Brown<br>BC- Black/ Rusted Charcoal Reversible | PC- Pull Chain |

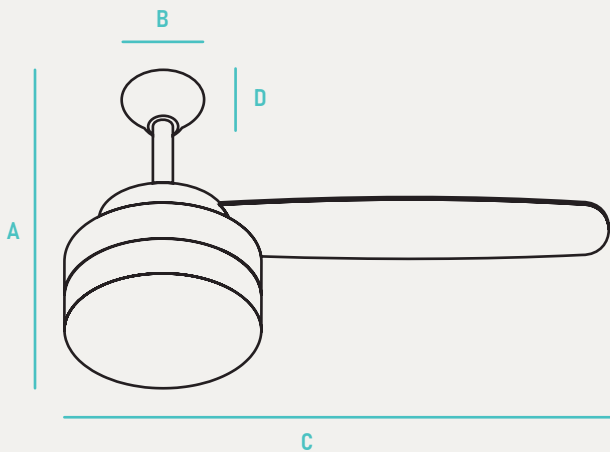

| PERFORMANCE DATA |      |       |          |      |     |
|------------------|------|-------|----------|------|-----|
| SPEED            | CFM  | WATTS | CFM/WATT | AMP  | RPM |
| High             | 3724 | 53.23 | 69       | 0.45 | 148 |
| Medium           | 3025 | 34.36 | 88       | 0.36 | 122 |
| Low              | 1924 | 16.24 | 118      | 0.25 | 77  |

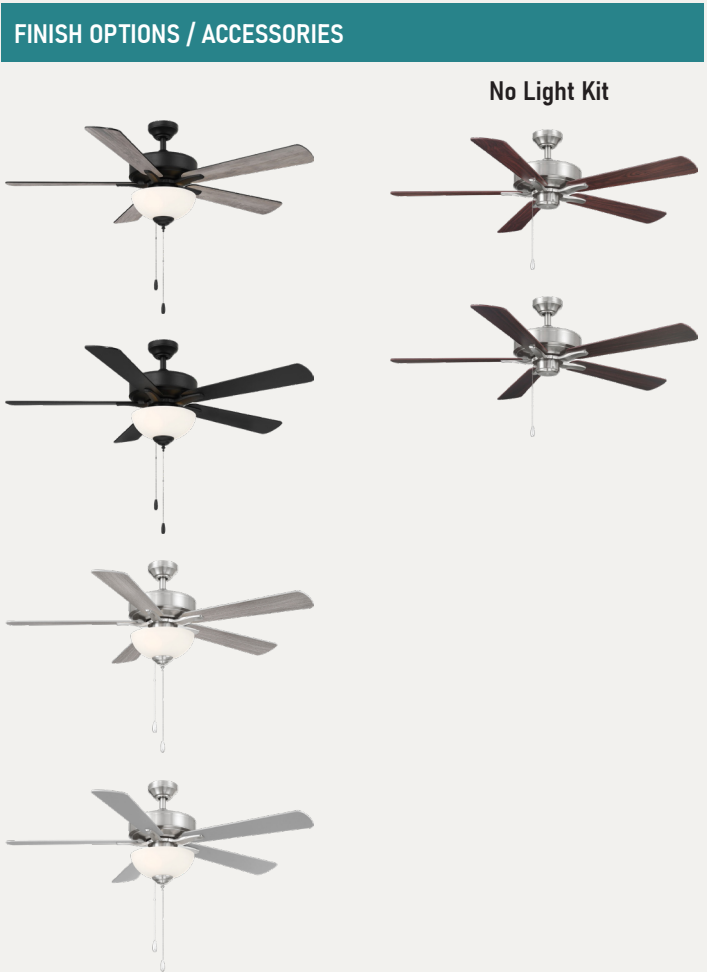

FINISH OPTIONS / ACCESSORIES

|                     | A     | B    | C   | D    | Case QTY |
|---------------------|-------|------|-----|------|----------|
| HES2                | 18.8" | 5.1" | 52" | 2.1" | 1        |
| HES2 (No Light Kit) | 12.9" | 5.1" | 52" | 2.1" | 1        |

CONSTRUCTION

Steel Housing, Plywood Blades and Frosted White Glass Light Diffuser provides uniform appearance without pixelation. Includes a 3/4" diameter downrod (6").

MOTOR

3-Speed AC Motor with 60" Lead Wire and triple capacitor.

QUALIFICATIONS

All ceiling fans are built to UL 507 standards, and bear appropriate ETL labels. Dry location labeling is standard.

BLADES

52" Sweep; 5 Blade

ELECTRICAL

Operates at 120V 60HZ. Optional Remote Control (Sold Separately). Optional Wall Control (Sold Separately) .

WARRANTY

Light Source: 3-year limited warranty. Motor: Limited Lifetime Warranty. Non-Electrical 1 Year Limited Warranty. See complete warranty for terms and exclusions. (Labor not included).

COMPATIBLE JUNCTION BOXES



4" PVC Ceiling Box